




# ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

**N30AH**

Characteristic	Units	Min	Max
		Br	T
Hcb	KGs	10.8	11.3
	kOe	≥10.2	
Hcj	kA/m	≥805	
	kOe	≥35	
BH Max	kA/m	≥2790	
	MGOe	28	32
	kJ/m <sup>3</sup>	223	255
$\alpha$ (Br)	%/°C	-0.10	
$\beta$ (Hcj)	%/°C	-0.45	
Max Temperature	°C	≤250	
Density	g/cm <sup>3</sup>	7.65	

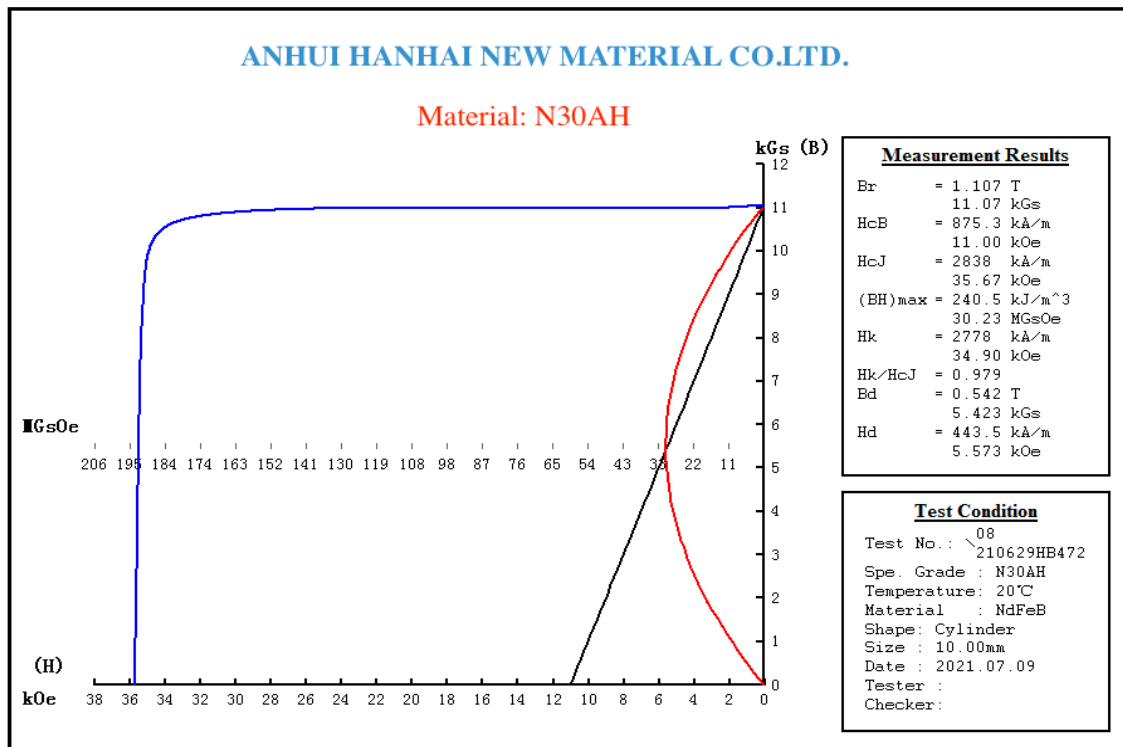

**Notes** The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.