




ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

N33AH

Magnetic Properties	Characteristic	Units	Min	Max
	Br		T	1.13
		KGs	11.3	11.8
Hcb		kOe	≥10.7	
		kA/m	≥853	
Hcj		kOe	≥35	
		kA/m	≥2790	
BH Max		MGOe	31	35
		kJ/m ³	247	279
	α (Br)	%/°C	-0.10	
	β (Hcj)	%/°C	-0.45	
	Max Temperature	°C	≤250	
	Density	g/cm ³	7.65	

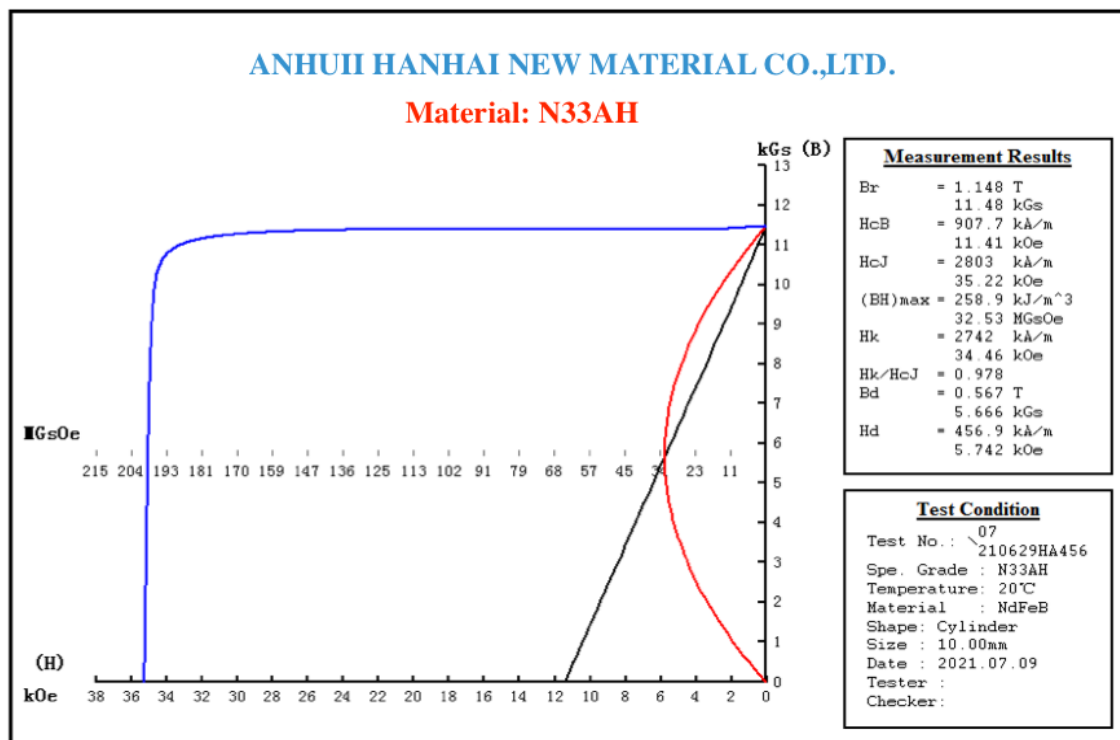

Notes The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.