




ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

N38 Neodymium Magnets

Magnetic Properties	Characteristic	Units	Min	Max
	Br		T	1.23
		KGs	12.3	12.8
Hcb		kOe	≥10.8	
		kA/m	≥861	
Hcj		kOe	≥12	
		kA/m	≥955	
BH Max		MGOe	36	39
		kJ/m ³	287	310
α (Br)		%/°C	-0.12	
β (Hcj)		%/°C	-0.70	
Max Temperature		°C	≤80	
Density		g/cm ³	7.50	

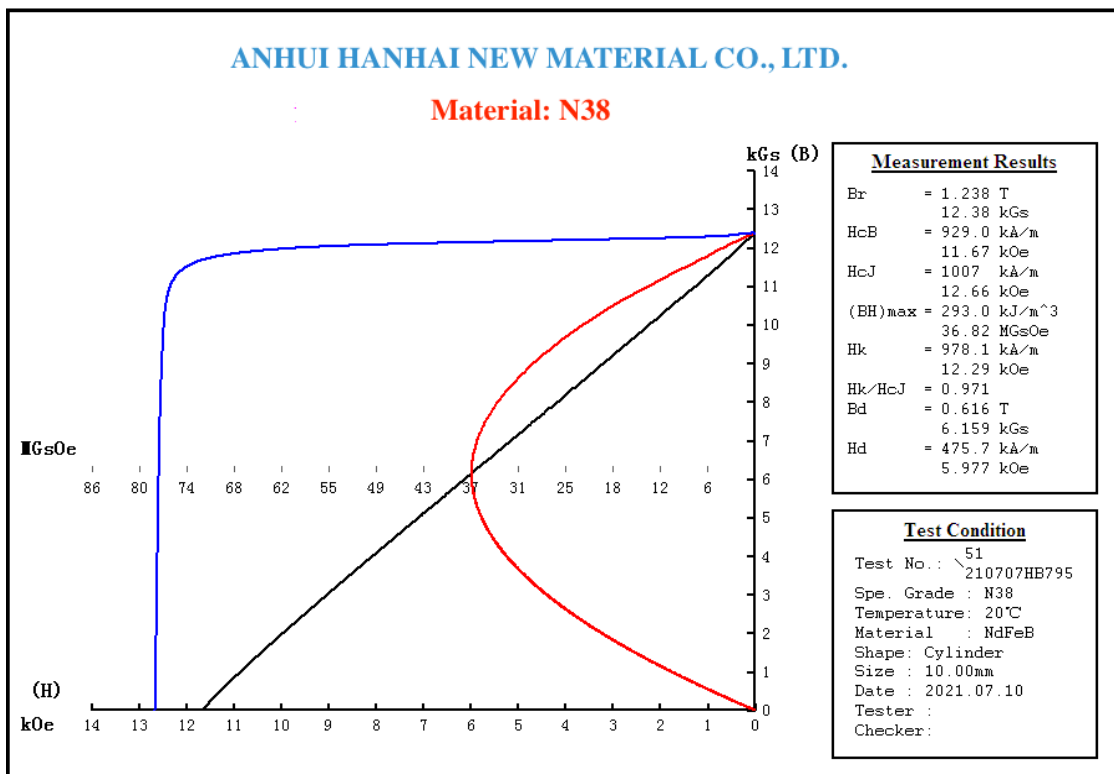

Notes The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.