




ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

rare earth neodymium magnets n50

Characteristic	Units	Min	Max
		Br	T
Hcb	KGs	14.0	14.3
	kOe	≥10.8	
Hcj	kA/m	≥861	
	kOe	≥11.5	
BH Max	kA/m	≥915	
	MGOe	47	50
	kJ/m ³	374	398
α (Br)	%/°C	-0.12	
β (Hcj)	%/°C	-0.70	
Max Temperature	°C	≤80	
Density	g/cm ³	7.60	

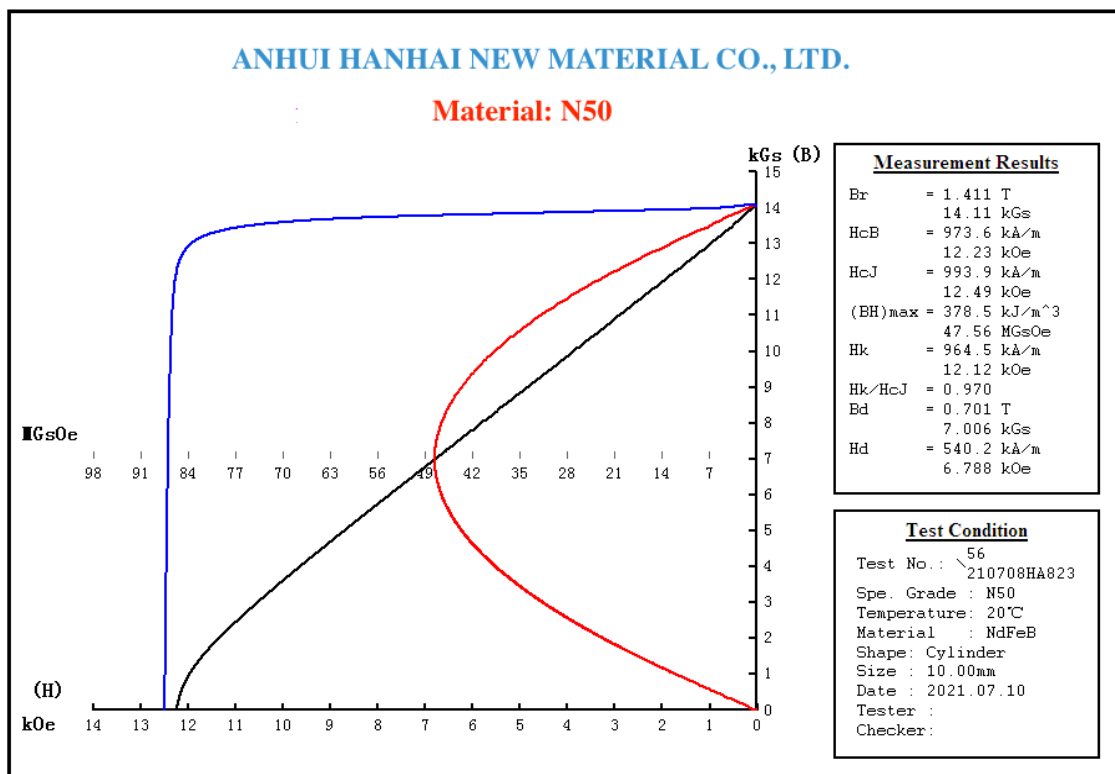

Notes The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.