




# ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

## Standard Sintered NdFeB (Neodymium Magnets)

## N42

Magnetic Properties	Characteristic	Units	Min	Max
	Br		T	1.29
		KGs	12.9	13.4
Hcb		kOe	≥11.3	
		kA/m	≥901	
Hcj		kOe	≥12	
		kA/m	≥955	
BH Max		MGOe	40	44
		kJ/m <sup>3</sup>	318	350
α (Br)		%/°C	-0.12	
β (Hcj)		%/°C	-0.70	
Max Temperature		°C	≤80	
Density		g/cm <sup>3</sup>	7.55	

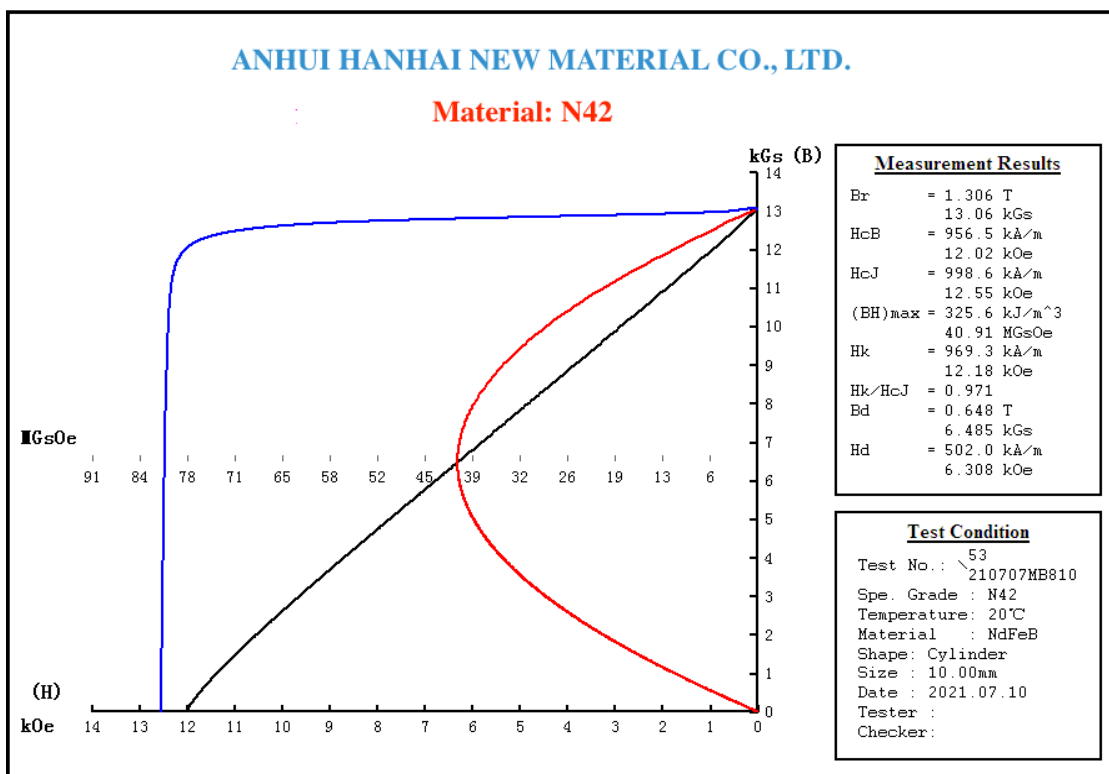

**Notes** The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.