




ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

N45AH

Magnetic Properties	Characteristic	Units	Min	Max
	Br		T	1.32
		KGs	13.2	13.6
Hcb		kOe	≥12.3	
		kA/m	≥989	
Hcj		kOe	≥35	
		kA/m	≥2786	
BH Max		MGOe	43	45
		kJ/m ³	334	366
	α (Br)	%/°C	-0.112	
	β (Hcj)	%/°C	-0.45	
	Max Temperature	°C	≤230	
	Density	g/cm ³	7.60	

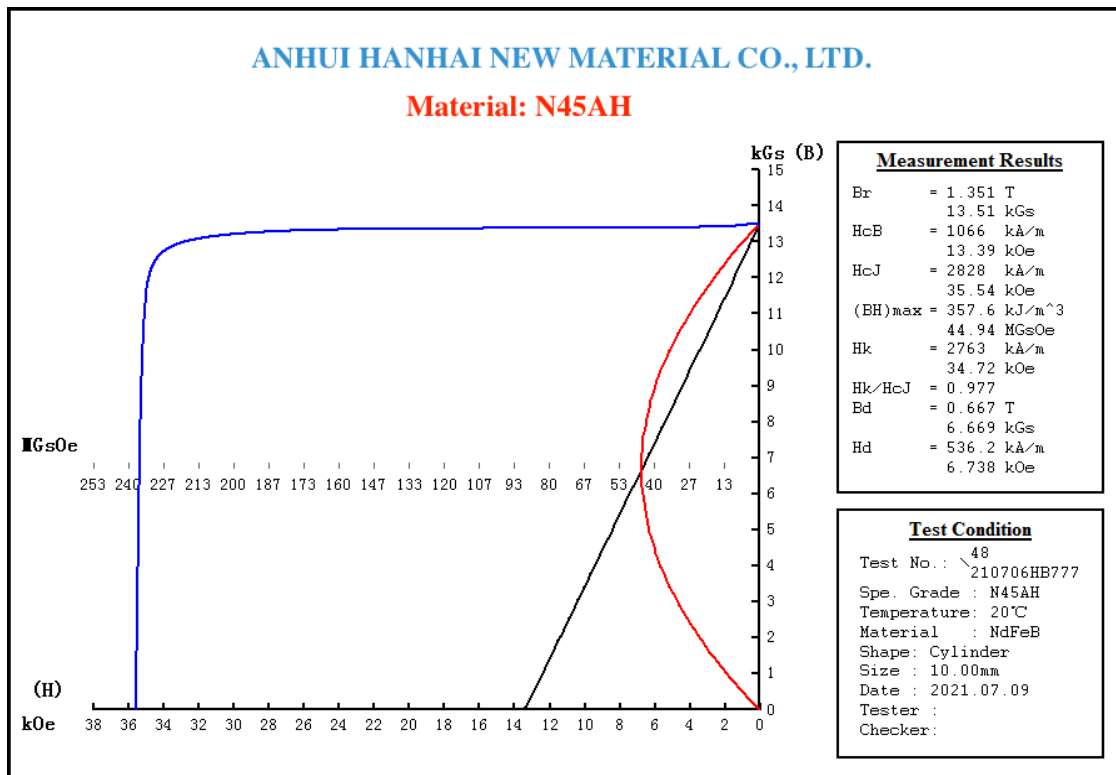

Notes The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.